


产品简述 (Product Profile)

RHPA系列电阻器防护等级高可达IP54，散热性能好，外形美观，适用于环境要求比较高的场合。



RHPA series resistors whose Ingress Protection can reach up to IP54 are designed with good dissipation and neat appearance ,applicable to environmentally demanding conditions.

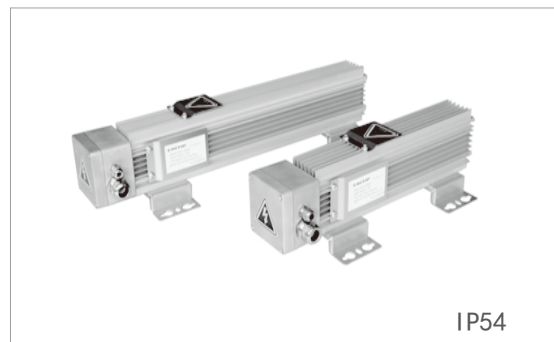

产品特点 (Product Features)

- | | |
|----------------------|---|
| 1. 额定功率范围：300W~2000W | 1. Rated power range: 300W~2000W |
| 2. 工作电压范围：<690V | 2. Operating voltage range:<690V |
| 3. 额定阻值范围：1R~10KR | 3. Rated resistance range: 1Ω~10KΩ |
| 4. 散热器外壳，温升更低 | 4. Lower temperature rise due to heat sinking case |
| 5. 带内置温控开关 | 5. With thermal switch |
| 6. 铸铝接线盒，防护等级 > IP54 | 6. Die-casting aluminum connection box, IP rating: more than IP54 |

产品尺寸图 (Product Size)

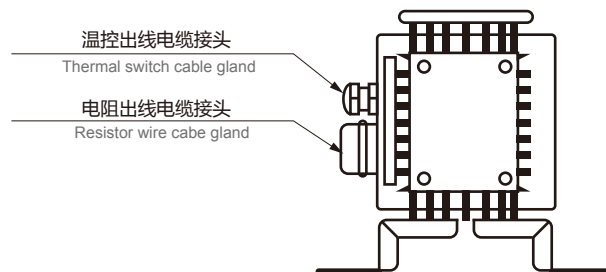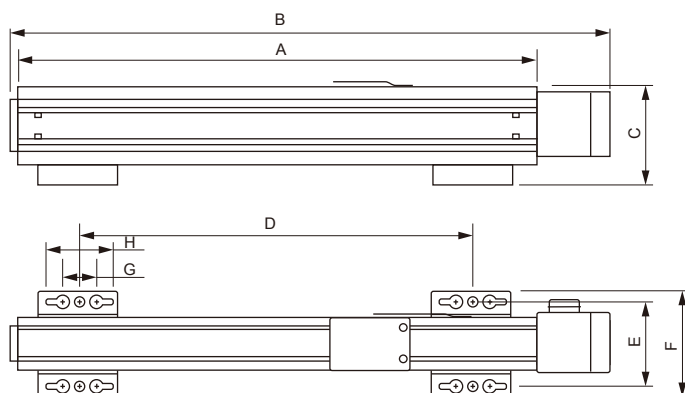

此款产品需20pcs起订

产品尺寸表 (Product Size)

规格 Type	功率 Rated power(W)	外型图 Product picture	尺寸 Dimension(mm)								阻值 Resistance value(Ω)
			A	B	C	D	E	F	G	H	
RHPA	300	图 A Picture A	295	366	115	195	105	127	30	49.5	1Ω-10kΩ
RHPA	500		295	366	115	195	105	127	30	49.5	1Ω-10kΩ
RHPA	800		380	451	115	280	105	127	30	49.5	1Ω-10kΩ
RHPA	1000		426	497	115	326	105	127	30	49.5	5Ω-10kΩ
RHPA	1200		526	597	115	426	105	127	30	49.5	5Ω-10kΩ
RHPA	1500		626	697	115	526	105	127	30	49.5	5Ω-10kΩ
RHPA	1800		726	797	115	626	105	127	30	49.5	5Ω-10kΩ
RHPA	2000		726	797	115	626	105	127	30	49.5	5Ω-10kΩ

其他技术参数要求, 请垂询我司业务

For other technical parameters & requirements, please contact our company's salespeople

产品参数 (Product Parameters)

规格 Type	功率 Rated power(W)	最大温升 (K @40°C) Max. temperature rise (K @40°C)	制动功率 Braking power				时间常数 Time constant	阻值范围 Resistance range(Ω) ±5%
			P 1/120 kW@40°C	P 5/120 kW@40°C	P 10/120 kW@40°C	P 40/120 kW@40°C		
RHPA	300	300	9	3	1.5	0.9	1000	1Ω-10kΩ
RHPA	500	300	15	5	2.5	1.5	1000	1Ω-10kΩ
RHPA	800	350	24	8	4	2.4	1000	1Ω-10kΩ
RHPA	1000	380	30	10	5	3	1000	1Ω-10kΩ
RHPA	1200	400	36	12	6	3.6	1800	5Ω-1kΩ
RHPA	1500	450	45	15	7.5	4.5	1800	5Ω-1kΩ
RHPA	1800	450	54	18	9	5.4	1800	5Ω-1kΩ
RHPA	2000	450	60	20	10	6	1800	5Ω-1kΩ

其他技术参数要求, 请垂询我司业务

For other technical parameters & requirements, please contact our company's salespeople

成品识别码 (Product Identification Code)

RHPA	0500	0032	9999G	J
产品类别 Product Type	功率 Rated power 60W-500W 0020-20W 2K00-2KW	电阻阻值 Resistance value(ohm) (Ω)indicates resistance value in units of ohms 0R08-0.08Ω/ 0032-32Ω/8K00-8KΩ	接线 Connection G=端子Terminal	电阻阻值误差 Resistance tolerance H=±3% K=±10% J=±5%

RHPA.0500.0032.9999G(“9999G”表示常规品, 此款产品为常规品2kW/32 R高防护铝壳电阻器)

9999G means standard product, 2kW/32R High Protective Aluminum Resistor)

RHPA.0500.0032.6218A(“6218A”表示客户代码, 此款产品为客户定制的2kW/32 R高防护铝壳电阻器)

6218A means customer code, customer non-standard product 2kW/32R High Protective Aluminum Resistor)